

## INSTALLATION INSTRUCTIONS

### CWS Filtro Ducha Shower Filter

CWS shower filter comes complete with all the necessary hardware for most installations. Each filter gives you up to 6 months of filtered water. The filter should be changed after 6 months of use or 10,000 gallons, whichever comes first.


The shower filter installs quickly and easily on any standard 1/2" threaded shower arm

#### **WARNING**

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

### INSTALLING A SHOWER FILTER


#### Step 1 - Rinse the Shower Filter

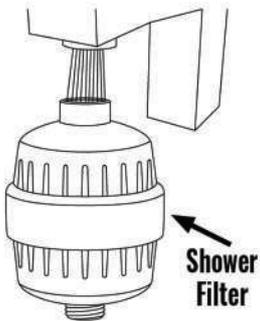

Place the shower filter under running water for 60 seconds. This will help remove any built-up carbon dust from inside the shower filter.

Water may turn grey for the first few seconds. Keep flushing the filter for 20 seconds. Turn shower filter over and run water in the opposite direction.


#### Step 2 - Remove Shower Head or Mount

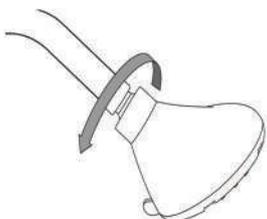

Remove the existing shower head from the shower arm by turning counter-clockwise. This can usually be done by hand, but you may need a wrench if your old shower head is on too tight.

If you have an electric shower, remove the shower mount from the hose.


#### Step 3 - Clean Shower Arm/Hose

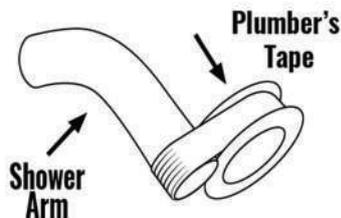

Clean any excess material from the shower arm threads, so they are clean.

If needed, wrap a Plumber's Tape (Teflon tape) tightly around the threads of your CWS Filtro Ducha shower filter and the shower arm.

#### Step 4 - Attach Shower Filter to Shower Arm/Hose

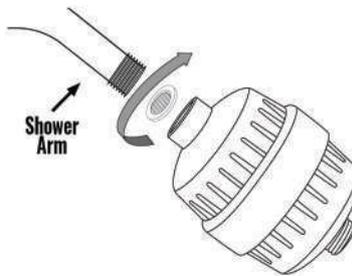

Ensure the rubber washers are secured in place on both the female and male fittings of the shower filter.

Next, hand tighten the shower filter to the shower arm or hose by turning it clockwise.

#### Step 5 - Attach Shower Head or Shower Mount to Shower Filter



Attach the shower head or shower mount on to the shower filter and hand tighten the shower to the shower filter by turning it clockwise.